



PRODUCT: _____

SKU NUMBER: _____


QUANTITY: _____

FEATURES

- Fixed Stainless Steel Chemical injector- 1.8mm orifice, 2.0-3.0 GPM, Rated Pressure 5500PSI
- Injection after pump connected inline with peristaltic pump.
- Available to use harsh chemicals consisting of Hydrogen Peroxide.
- Recommended to use a # 60 nozzle on spraygun for cleaning efficiency.



300-0636

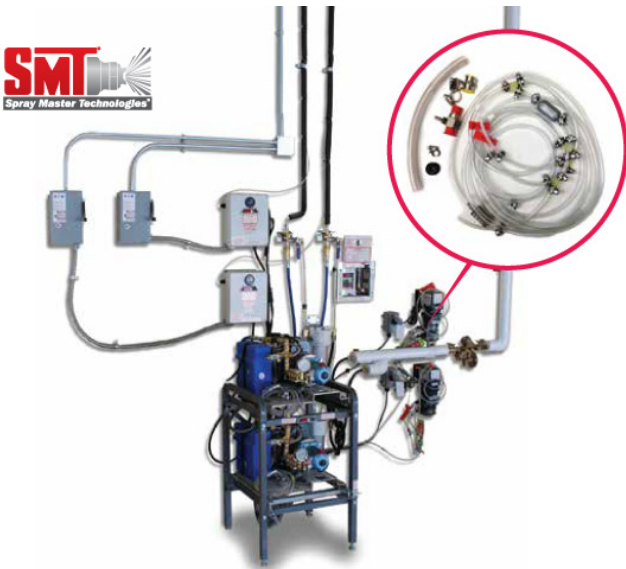

SMT - After the Pump Harsh Chemicals, 600 REK Retrofit Kit

TOLL FREE: 800-548-3373

115 E. Linden • Rogers, Arkansas 72756 USA
 (479) 636-5776 • Fax: (479) 636-3245




www.spraymastertech.com

SMT300-0636

*Prices and Specifications are subject to change without prior notice.

SMT - After the Pump Harsh Chemicals, 600 REK Retrofit

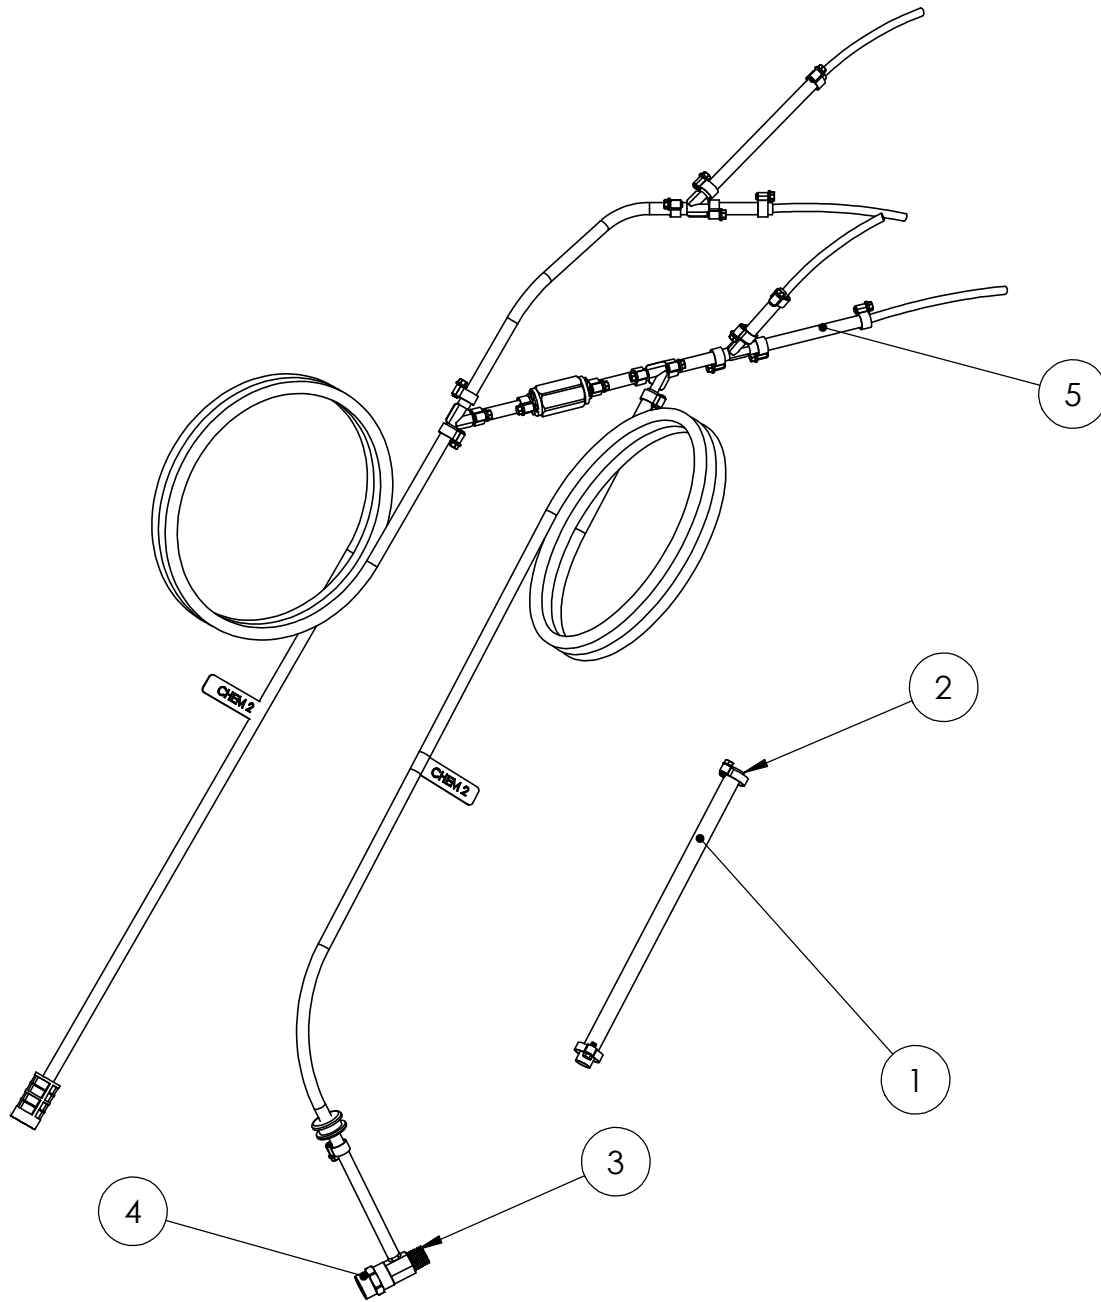

- 1) 300-3110 Tubing,Reinf Vinyl,1/2 ID X 3/4 OD 1 FT
- 2) 300-1290 Clamp,Hose,5/16-7/8 Dia,SS,Screw Type 2 EA
- 3) 300-0640 Injector, Chem, 1.8MM, SS, W/O Valve 1 EA
- 4) 300-0409 Coupler,Hex,3/8",SS 1 EA
- 5) 300-0641 Tubing Assy, Check Valve, 600 REK 1 EA